

MIRACLE MAX PLUS

"Your path to healthy water"



"Your path to healthy water"



CONTENT

BASIC INFORMATION ABOUT WATER IONIZERS	4
PRODUCT DESCRIPTION	9
INSTALLATION	12
PRODUCT USAGE	17
INSTRUCTIONS	20
MINERAL PORT USE	25
IONIZER CARE	26
HOW TO CHANGE THE FILTER	28
WARNING	30
TROUBLESHOOTING	33
SPECIFICATIONS	36

○ *Miracle Max Plus*

BASIC INFORMATION ABOUT WATER IONIZERS

CONGRATULATIONS ON CHOOSING CHANSON® - THE HIGHEST QUALITY IONIZER BRAND IN THE WORLD! ALL MODELS WE OFFER ARE CUTTING-EDGE PRODUCTS ON THE MARKET. WHEN DEVELOPING CHANSON®, THE GREATEST EMPHASIS WAS PLACED ON ITS SIMPLE MANIPULATION AND INSTALLATION. IT IS SO SIMPLE THAT ANYONE CAN DO IT!

HOW IONIZER WORKS

THE BASIC FUNCTION OF WATER IONIZER IS TO DIVIDE WATER INTO TWO ELECTROLYSIS FORMS:

- ALKALINE WATER
- ACIDIC WATER


THE BASIC PRINCIPLE OF IONIZER IS NOTHING MORE THAN GIVING THE WATER ITS BASIC LIFE FORM. THANKS TO CHARGED ELECTRONS IT IS TURNED INTO ALKALINE **LIVING WATER**.

EACH IONIZER WE OFFER CONTAINS PLATINUM COATED TITANIUM PLATES (ELECTRODES) WHICH FORM THE ELECTROLYSIS CHAMBER SEPARATED BY CERAMIC DIAPHRAGMS AS DIVIDERS OF POSITIVELY AND NEGATIVELY CHARGED WATER. WATER IONIZERS ARE ALSO KNOWN AS ELECTROLYSIS WATER MACHINES, ION WATER MACHINES, OR ALKALINE WATER MACHINES.


FIRST, THE WATER GOES THROUGH A PRE-FILTRATION, PJ7000 NANOFILTER. IT MAY ALSO BE PRE-FILTERED VIA OPTIONAL ADDITIONAL FILTRATION SYSTEM. THEN, THE PURIFIED WATER GOES THROUGH THE ELECTROLYSIS PROCESS IN THE ELECTRODE BATH WHERE THE IONS ARE SEPARATED INTO TWO PATHS: ALKALINE AND ACIDIC.

AFTER THE PROCESS OF ELECTROLYSIS, CALCIUM, MAGNESIUM, SODIUM, POTASSIUM, AND OTHER MINERALS ARE DRAWN BY THE NEGATIVE POLE (ALKALINE), AND SULPHURIC ACID AND SULPHUR ARE DRAWN BY THE POSITIVE POLE (ACIDIC). DUE TO AN INCREASE OF HYDROGEN IONS (H^+) ACIDIC WATER IS PRODUCED.


NORMALLY, WATER MOLECULES FROM TAP WATER FORM CLUSTERS WITH 12-18 WATER MOLECULES. DURING THE PROCESS OF ELECTROLYSIS, THE HYDROGEN BONDS BETWEEN WATER MOLECULES ARE PARTIALLY OPENED GENERATING SMALLER GROUPS OF 5 TO 6 WATER MOLECULE CLUSTERS. AT THE SAME TIME UNDER THE ACTION OF ELECTRIC FIELD FORCE, Ca^{2+} , Mg^{2+} , K^+ AND OTHER POSITIVE IONS WILL MOVE TOWARDS THE NEGATIVE POLE, AND THE OPPOSITE Cl^- , SO_4^{2-} , NO_3^- , NO_2^- AND OTHER NEGATIVE IONS WILL MOVE TOWARDS THE POSITIVE POLE.

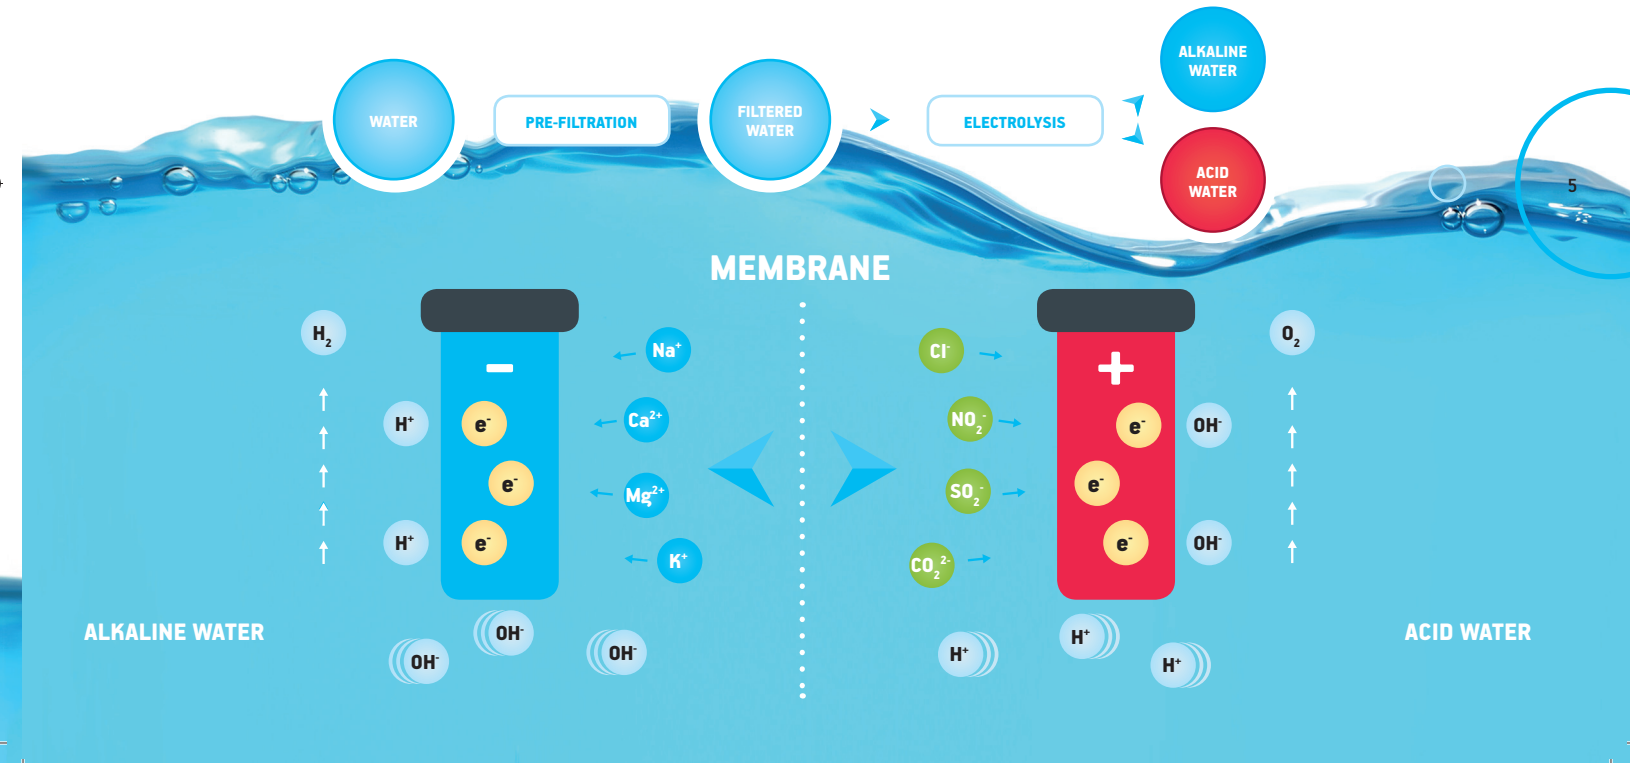


WATER IONS UNDER ELECTROLYSIS PROCESS:



NEGATIVE POLE:



POSITIVE POLE:



POSITIVELY CHARGED IONS ARE DRAWN BY THE NEGATIVE POLE TO FORM "REDUCED (ALKALINE) WATER" WHERE AVAILABLE ALKALINE MINERALS FROM SOURCE WATER ARE GATHERED. THESE ARE CALCIUM, MAGNESIUM OR POTASSIUM. THIS PURE, HEALTHY ALKALINE WATER WITH SMALL MOLECULE CLUSTERS IS LEAD VIA MAIN STAINLESS STEEL OUTLET TO BE USED FOR DRINKING AND COOKING PURPOSES.

NEGATIVE CHARGED IONS ARE DRAWN BY THE POSITIVE POLE TO FORM "OXIDIZED (ACIDIC) WATER" WHERE ACIDIC MINERALS, SUCH AS NITRATES, SULPHIDES, CHLORIDES AND FLUORIDES FROM SOURCE WATER, GATHER. THIS TYPE OF WATER CAN BE USED FOR MANY UTILITARIAN PURPOSES. IF NOT USED, IT WILL LEAVE VIA DRAIN PIPE.

NEGATIVE POLE (ALKALINE) CREATES A GREATER NUMBER OF ELECTRONS (E-) WHICH PENETRATE THE WATER WE DRINK, WHILE ELECTRONS (E-) PRODUCED BY POSITIVE POLE ARE DRAWN BY ITS POSITIVE CHARGE. UNLIKE THE ALKALINE WATER, ACIDIC WATER CONTAINS NO ELECTRONS. THE PRESENCE OF ELECTRONS IS ALSO CRUCIAL FOR INCREASING NEGATIVE ORP OF ALKALINE WATER.

BENEFITS OF WATER IONIZERS

- ① ALKALINE WATER HELPS NEUTRALIZE ACIDS IN THE BODY, WHICH IS A KEY FOR PREVENTING DISEASES AND IMPROVING YOUR HEALTH, ACCORDING TO MANY EXPERTS;
- ① ALKALINE WATER ACTS AS A POTENT ANTIOXIDANT SEEKING FREE RADICALS BY WHICH IT HELP TO PROTECT YOU AGAINST ILLNESSES AND CHRONIC DISEASES;
- ① THE SIZE OF CLUSTERS OF IONIZED WATER MOLECULES IS SMALLER WHICH ALLOWS MAXIMUM ABSORPTION AND HYDRATION WHILE ACCELERATING METABOLISM WHICH HELPS YOU TO MAINTAIN YOUTH AND HEALTH;
- ① MINERALS PRESENT IN ALKALINE WATER ARE MORE NATURAL AND SUITABLE FOR MAINTAINING THE RECOMMENDED DAILY DOSE OF MINERALS;

- ① ALKALINE WATER IMPROVES THE TASTE OF FOOD AND IS SUITABLE FOR ALL TYPES OF FOOD PREPARATION AND COOKING;
- ① ACIDIC WATER IS SUITABLE FOR USE IN BEAUTY SALONS, TO WASH YOUR FACE AND OTHER ANTIBACTERIAL PURPOSES.

BENEFITS OF OUR IONIZERS

- ① CHOICE OF PH VALUE FROM 2.4 TO 11.7*;
- ① AUTOMATIC DETECTION OF EXCESSIVE WATER FLOW AND TEMPERATURE SENSOR FOR IONIZER PROTECTION;
- ① POSSIBILITY OF MODULATING THE VALUES OF ORP FROM +1200 TO -920*;
- ① PARENTAL CONTROL LOCK FOR DESIRED PH LEVEL;
- ① AUTOMATIC EVALUATION OF ELECTROLYTIC VALUES ENSURING STABILITY OF SELECTED PH;
- ① AUTOMATIC CHECK OF THE FILTER LIFE DISPLAYED ON LCD SCREEN;
- ① INTELLIGENT AUTOMATIC CLEANING OF ELECTRODES AT EVERY WATER FLOW;
- ① QUALITY OF MATERIALS AND WORKMANSHIP.

* DEPENDING ON WATER QUALITY AND OTHER EXTERNAL FACTORS.

OTHER POSSIBILITIES OF OUR IONIZERS

- ① USE OF MINERAL PORT TO OBTAIN THE MAXIMUM PH AND ORP VALUES (FOR MORE INFORMATION SEE PAGE 29)

○ *"Your path to healthy water"*

ACID WATER		FILTERED WATER	ALKALINE WATER			
pH 2,5- 4	pH 5,5	pH 7,0	pH 8,5	pH 9,0	pH 9,5	pH 11+
						
① Antibacterial ① Sterilization ① Household cleaning	① Plant watering ① Beauty use ① Moisturizing	① pH neutral ① Medication ① Suitable for baby milk preparation	① Optimal for first time drinking ① Supplies minerals ① Improvement of overall children's health	① Suitable for everyday drinking ① Suitable for cooking purposes ① Optimal for coffee and tea preparation ① Hydration when doing sport	① Everyday drinking ① Cell rejuvenation ① Improvement of chronic health problems ① Elimination of fatigue and tiredness	① Fruit and vegetable cleaning ① Stain removal ① Dishes cleaning



PH VALUE DEMONSTRATED IN THIS MANUAL CAN DIFFER FROM THE VALUES DISPLAYED ON THE DEVICE DUE TO DIFFERENCES IN THE TAP WATER QUALITY. SHOULD YOU HAVE ANY CONCERNS, PLEASE CONTACT YOUR DEALER.

PRODUCT DESCRIPTION

CONSOLE UNIT

FRONT VIEW


- A DISPLAY
- B DEVICE FRONT PANEL
- C SIDE FLOW CONTROL VALVE
- D DEVICE TOUCH CONTROL PANEL
- E IONIZED WATER OUTLET

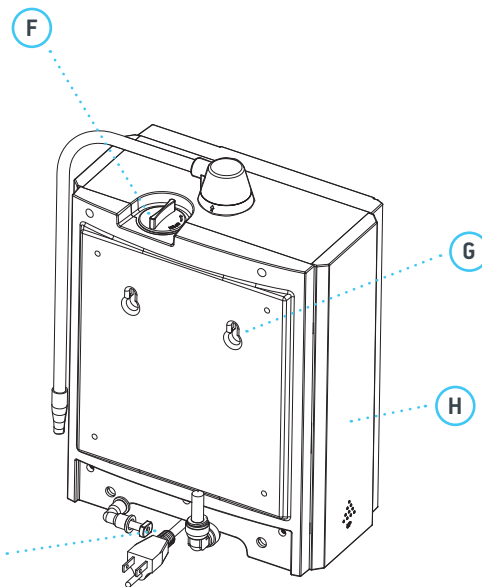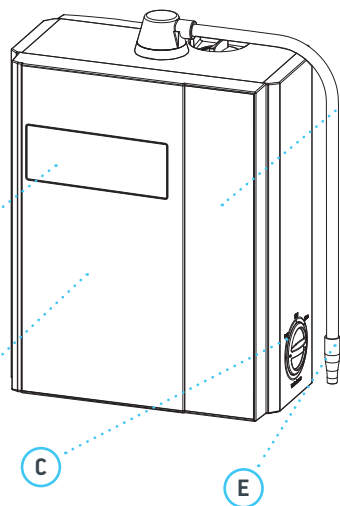

BACK VIEW

- F MINERAL PORT
- G MOUNTING HOLES
- H PJ7000 FILTER PANEL (A1 SILVER)
- I POWER CORD

○ *"Your path to healthy water"*

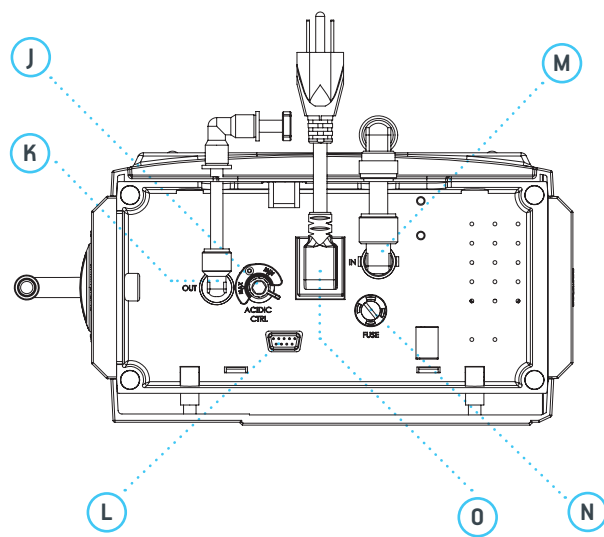


BOTTOM VIEW








- J** DRAIN FLOW REGULATOR VALVE
- K** DRAIN WATER OUTLET

- L** SOFTWARE UPDATE CONNECTOR
- M** SOURCE WATER INLET

- N** FUSE
- O** AC SOCKET



INSTALLATION ACCESSORY KIT



ACCESSORIES

A FLEXIBLE OUTLET TUBE

B PRESSURE REDUCER (Ø 1/4" QUICK CONNECT)*

C ACCESSORIES FOR WALLMOUNT

D 100 CM TUBE (Ø 1/4")

E ACCESSORIES FOR FIXING OF DRAIN OUTLET

F PH REAGENT DROPS KIT (PH REAGENT DROPS, PH TESTING BOTTLE, COLOUR CHART)

G AC POWER CABLE

H MINERAL INSERT BASKET – ONE INSTALLED IN THE DEVICE


I FAUCET DIVERTOR VALVE (FOR QUICK INSTALLATION)

J CD

* WATER OUTPUT PRESSURE CANNOT EXCEED 70 PSI. THEREFORE IT IS ESSENTIAL THAT THE PRESSURE REDUCER IS INSTALLED. OTHERWISE, YOU RISK LOSING YOUR WARRANTY.

○ *Your path to healthy water*


BASIC INSTALLATION SCHEME

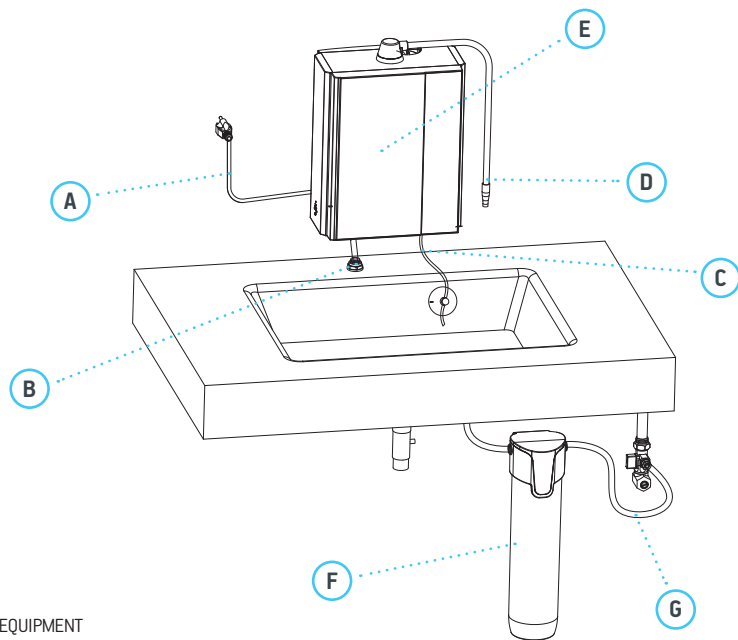


- A AC POWER CABLE
- B SOURCE WATER INLET FROM PRE-FILTRATION
- C DRAIN OUTLET
- D IONIZED WATER OUTLET
- E DEVICE FRONT PANEL
- F PRE-FILTRATION (PRE-FILTRATION SYSTEM IS OPTIONAL EQUIPMENT AND IS NOT PART OF THE IONIZER PACKAGE)
- G SOURCE WATER INLET

FAUCET DIVERTER INSTALLATION METHOD


A FAUCET DIVERTER INSTALLATION




1 REMOVE AERATOR
(TIP OF THE FAUCET).




4 SLIDE 1/4" TUBE OVER THE BARBED
WATER CONNECTION ON THE FAUCET
DIVERTER. IT MUST GO IN AT LEAST 12MM.
TIGHTEN WITH HOSE CLAMP.



2 MAKE SURE YOU HAVE THE FAUCET
DIVERTER WITH THE RUBBER GASKET
AND AERATOR EXTENSOR IF NEEDED
FOR FEMALE THREADS ON FAUCET.



5 USE PLIERS TO MAKE SURE THE
DIVERTER IS TIGHTENED.




3 SCREW IN THE FAUCET DIVERTER.

○ *"Your path to healthy water"*




B WATER INLET TUBE CONNECTION




TAKE THE END OF THE TUBE CONNECTED TO THE FAUCET DIVERTER AND INSERT IT INTO WATER INLET QUICK CONNECT WHICH IS PLACED AT THE BACK OF THE DEVICE (MARKED AS IN AT THE BOTTOM). PUSH THE TUBE AS FAR AS YOU CAN, IT SHOULD GO IN ABOUT 24MM.

C WATER OUTLET TUBE CONNECTION



1 INSERT THE END OF THE HOSE INTO THE ACID WATER OUTLET QUICK CONNECT WHICH IS PLACED AT THE BACK OF THE DEVICE (MARKED AS OUT AT THE BOTTOM) PUSH THE TUBE AS FAR AS YOU CAN, IT SHOULD GO IN ABOUT 16MM.




2 WATER OUTLET TUBE SHOULD COMFORTABLY REACH THE SINK. TO FIX IT ON THE SIDE OF THE SINK, USE A SUCTION CUP (AS SHOWN IN THE PICTURE), WHICH IS A PART OF THE INSTALLATION KIT.


* SHOULD YOU NOT WISH TO HAVE THE TUBE LED TO THE SINK, IT IS POSSIBLE TO CONNECT IT DIRECTLY TO THE WASTE LINE (CONTACT YOUR DEALER FOR THE APPROPRIATE FITTINGS).

* DEALER TAKES NO RESPONSIBILITY FOR THE BAD FUNCTIONING OF THE DEVICE OR ACCIDENTS CAUSED BY FAULTY INSTALLATION.

D FLEXIBLE SPOUT INSTALLATION



1 SCREW THE FLEXIBLE SPOUT INTO THE ROTATING NECK OF THE IONIZER PLACED AT THE TOP OF THE DEVICE.



2 TURN CLOCKWISE UNTIL O-RING ON THE FLEXIBLE SPOUT IS IN. DO NOT OVER TIGHTEN.

E PLACEMENT

PLACE THE DEVICE ON THE DESK OR HANG IT ON THE WALL (USING MOUNTING HOLES AT THE BACK OF THE DEVICE. ACCESSORIES FOR WALLMOUNT ARE PART OF THE INSTALLATION KIT.)



INSTALLATION METHOD WITH DIRECT CONNECTION TO WATER SUPPLY LINE


A CONNECTION TO THE WATER SOURCE

- 1 FIND THE OUTLET OF COLD WATER SUPPLY.
- 2 TO CONNECT THE DEVICE TO THE COLD WATER PIPE IT IS RECOMMENDED TO USE AN ANGLE VALVE (THE SAME AS FOR CONNECTING DISHWASHER OR WASHING MACHINE) A SHUT-OFF VALVE (CONTACT YOUR DEALER FOR MORE INFORMATION).
- 3 CONNECT THE 1/4" TUBE WITH THE 1/4" PRESSURE REDUCER (ONLY IF NECESSARY).

*INSTALLATION OF PRE-FILTRATION SYSTEM IS ALWAYS RECOMMENDED.

B WATER INLET TUBE CONNECTION

- 1 RUN THE 1/4" TUBE THROUGH THE KITCHEN UNIT AND INSERT IT INTO WATER INLET QUICK CONNECT OF THE DEVICE WHICH IS PLACED AT THE BACK OF THE DEVICE (MARKED AS IN AT THE BOTTOM). PUSH THE TUBE AS FAR AS YOU CAN, IT SHOULD GO IN ABOUT 24MM. ATTACH THE OTHER END TO THE WATER SUPPLY PIPE (OR PRE-FILTRATION SYSTEM).



○ *"Your path to healthy water"*

C WATER OUTLET TUBE CONNECTION

1 CONNECT THE 1/4" TUBE TO THE WATER OUTLET. THE OTHER END INSERT INTO THE ACID WATER OUTLET QUICK CONNECT WHICH IS PLACED AT THE BACK OF THE DEVICE (MARKED AS OUT AT THE BOTTOM). PUSH THE TUBE AS FAR AS YOU CAN, IT SHOULD GO IN ABOUT 16MM.

2 WATER OUTLET TUBE SHOULD COMFORTABLY REACH THE SINK. TO FIX IT ON THE SIDE OF THE SINK, USE A SUCTION CUP (AS SHOWN IN THE PICTURE), WHICH IS A PART OF THE INSTALLATION KIT.

* SHOULD YOU NOT WISH TO HAVE THE TUBE LED TO THE SINK, IT IS POSSIBLE TO CONNECT IT DIRECTLY TO THE WASTE LINE (CONTACT YOUR DEALER FOR THE APPROPRIATE FITTINGS).

D FLEXIBLE SPOUT INSTALLATION





1 SCREW THE FLEXIBLE SPOUT INTO THE ROTATING NECK OF THE IONIZER PLACED AT THE TOP OF THE DEVICE.

2 TURN CLOCKWISE UNTIL O-RING ON THE FLEXIBLE SPOUT IS IN. DO NOT OVER TIGHTEN.

E PLACEMENT


PLACE THE DEVICE ON THE DESK OR HANG IT ON THE WALL (USING MOUNTING HOLES AT THE BACK OF THE DEVICE. ACCESSORIES FOR WALLMOUNT ARE PART OF THE INSTALLATION KIT.)

*DEALER TAKES NO RESPONSIBILITY FOR THE BAD FUNCTIONING OF THE DEVICE OR ACCIDENTS CAUSED DUE TO INSTALLATION BY THE USER.



PRODUCT USAGE

TOUCH PANEL DESCRIPTION

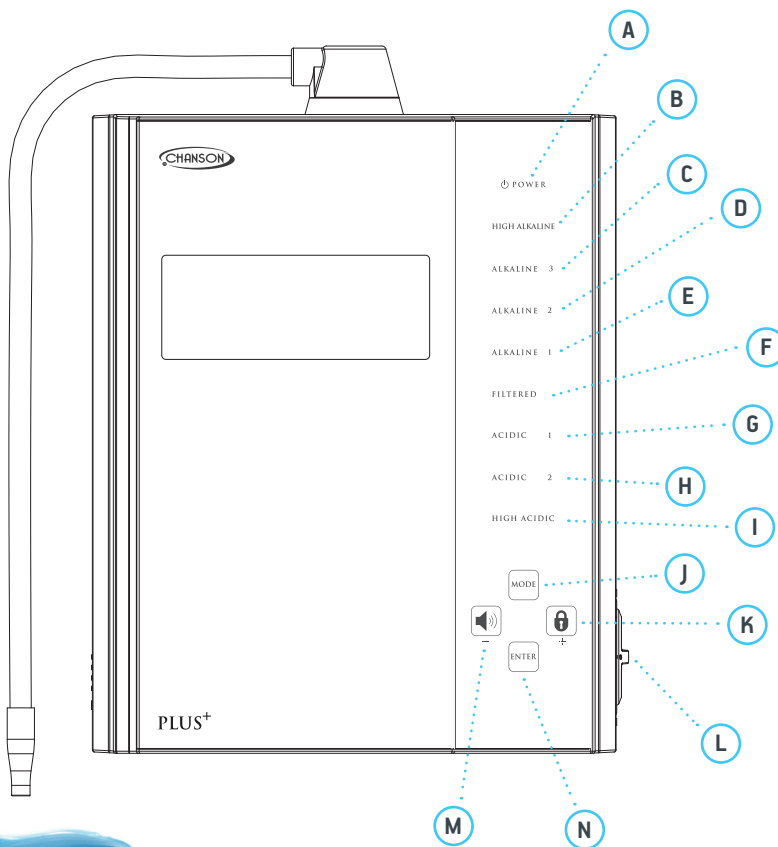


○ *"Your path to healthy water"*



A POWER (ON/OFF)	Turns the device on and off
B STRONG ALKALINE WATER (HIGH ALKALINE)	Ideal for washing fruit and vegetables
C LEVEL 3 ALKALINE WATER (ALKALINE 3)	Ideal for daily drinking, stress reduction and replenishment of minerals
D LEVEL 2 ALKALINE WATER (ALKALINE 2)	Ideal for daily drinking, cooking and baking
E LEVEL 1 ALKALINE WATER (ALKALINE 1)	Ideal for daily drinking. Suitable for people in the initial stage of drinking alkaline water
F FILTERED WATER (FILTERED)	Ideal for using with medication and for making baby food
G LEVEL 1 ACIDIC WATER (ACIDIC 1)	Suitable for cosmetic use, face cleansing and skin moisturising
H LEVEL 2 ACIDIC WATER (ACIDIC 2)	Suitable as organic detergent
I STRONG ACIDIC WATER (HIGH ACIDIC)	Ideal detergent to destroy germs and bacteria
J MODE (MENU)	A Press to switch between displaying information on pH and ORP B Press to enter the settings
K LOCK /+	Press to lock the desired water level usually consumed in your household
L POSTRANNÍ VENTIL KONTROLY PRŮTOKU VODY	Press to control the water flow and to increase desired values of the water
M VOLUME/-	Press to control the volume of the device
N ENTER	Press to confirm the settings mode



LCD SCREEN FEATURES

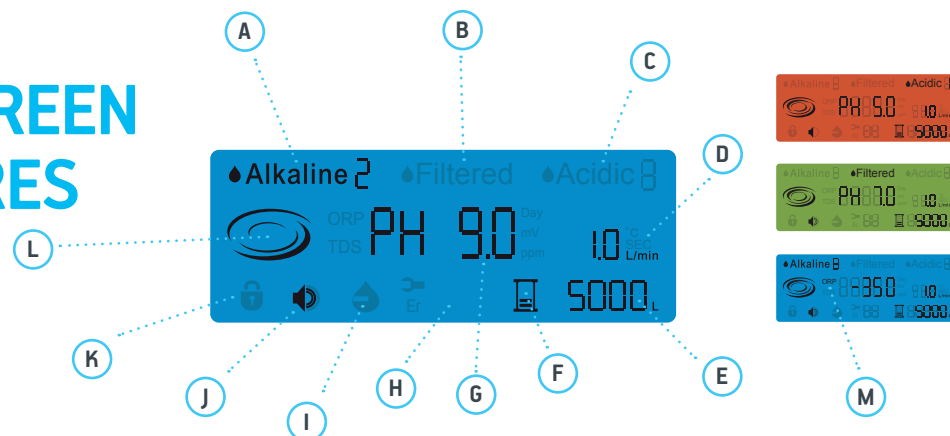

A ALKALINE WATER LEVEL INDICATOR

B FILTERED WATER INDICATOR

C ACIDIC WATER LEVEL INDICATOR

D FLOW RATE

E FILTER LIFE INDICATOR - COUNTER

INFORMS ABOUT THE AMOUNT OF WATER THAT THE FILTER IS YET ABLE TO FILTER. LIFE SPAN OF THE FILTER IS UP TO 9,000 LITRES OR UP TO 12 MONTHS (DEPENDING ON THE QUALITY OF INCOMING WATER).

F FILTER LIFE INDICATOR

G PH INDICATOR

THE DISPLAYED VALUE CAN DIFFER FROM THE ACTUAL ONE DUE TO DIFFERENCES IN QUALITY AND CONDITIONS OF INCOMING WATER.

H ERROR CODE INDICATOR

I LOW WATER FLOW INDICATOR

IF THIS SYMBOL APPEARS, THE DEVICE IS UNABLE TO FIND A SOURCE OF WATER OR THE WATER FLOW IS TOO LOW.

J VOLUME ICON

K LOCK ICON

IF THIS SYMBOL APPEARS, THE SELECTED LEVEL OF WATER IS LOCKED

L IONIZATION INDICATOR

IF THIS SYMBOL APPEARS, THE PRODUCTION OF IONIZED WATER IS IN PROCESS.

MORP INDICATOR

THIS SYMBOL INDICATES THE VALUE OF THE SELECTED WATER LEVEL. DISPLAYED NUMBER REFLECTS THE PRESSURE THAT IS EXERTED ON TITANIUM PLATES.

○ *Your path to healthy water*

INSTRUCTIONS

PLUG THE POWER CORD INTO THE POWER OUTLET

PLUG THE POWER CORD INTO THE POWER OUTLET. YOU'LL NOTICE THAT THE LCD SCREEN LIGHTS UP AND CHANGES IN 7 DIFFERENT COLOURS WHILE MAKING A PROMPT SOUND. BY PROMPT SOUND THE DEVICE INDICATES IT IS READY IN STAND-BY MODE WHICH LASTS FOR ABOUT 1 MINUTE. IF NO STEPS ARE TAKEN FOR THE IONIZED WATER TO BE PRODUCED ("POWER" BUTTON) OR NO OTHER ACTION TAKES PLACE, THE DEVICE WILL GO INTO SLEEP MODE. BY PRESSING ANY BUTTON ON THE TOUCH PANEL THE DEVICE WILL GO BACK TO THE ACTIVE MODE AND IT IS READY FOR USE.

NOTE: FOR SAFETY REASONS, THE DEVICE WILL AUTOMATICALLY TURN ITSELF OFF AFTER 15 MINUTES OF RUNNING ON THE SAME WATER LEVEL.


HOW TO USE THE IONIZER

A SELECT THE DESIRED WATER LEVEL AND PRESS "POWER" BUTTON TO TURN THE IONIZER ON. PRESS THE "POWER" BUTTON AGAIN TO TURN THE DEVICE OFF.


B YOU CAN CHANGE THE WATER LEVEL AT ANY POINT IN THE PROCESS OF WATER IONIZATION, EXCEPT WHEN THE STRONG ACIDIC WATER IS PRODUCED.

C STRONG ACIDIC WATER CAN ONLY BE SELECTED WHEN THE IONIZER IS OFF. DURING THE PROCESS OF PRODUCING THE STRONG ACIDIC WATER IT WILL NOT BE POSSIBLE TO CHANGE TO ANY OTHER WATER LEVEL. TO DO SO, YOU WILL NEED TO TURN THE IONIZER OFF. FOR SAFETY REASONS, THE IONIZER WILL AUTOMATICALLY GO INTO SELF-CLEANING CYCLE FOLLOWING THE STRONG ACIDIC WATER PRODUCTION.

D DRAIN CONTROL VALVE: THIS VALVE WILL ALLOW YOU TO MODIFY THE AMOUNT OF WATER THAT FLOWS FROM THE UPPER FLEXIBLE STAINLESS STEEL TUBE AND THE DRAIN TUBE. THE VALVE IS PLACED AT THE BOTTOM OF THE DEVICE NEXT TO THE DRAIN WATER OUTLET (OUT). WE CAN EASILY CHECK THE VALVE BY LAYING THE DEVICE ON THE BACK SO THE FRONT PANEL FACES UP. WHEN THE DRAINAGE KNOB POINTS TO „MAX“, THE RATIO OF ALKALINE AND ACIDIC WATER (THE RATIO BETWEEN THE AMOUNT OF WATER FLOWING OUT FROM THE UPPER OUTLET TUBE AND THE AMOUNT OF WATER FLOWING FROM THE DRAIN TUBE) IS SET TO A RATIO OF 1:1. WHEN THE DRAINAGE KNOB POINTS TO "MIN", THE AMOUNT OF WATER COMING FROM THE DRAIN TUBE WILL BE SMALLER COMPARED TO THE AMOUNT OF WATER COMING FROM THE TOP FLEXIBLE TUBE.



DRAINAGE KNOB POINTING TO "MIN"



DRAINAGE KNOB POINTING TO "MAX"

E MINERAL PORT: THIS WILL ALLOW YOU TO ADD MINERALS TO IMPROVE THE QUALITY OF THE WATER AND TO INCREASE/DECREASE THE MAXIMUM ATTAINABLE PARAMETRES IN THE PROCESS OF WATER IONIZATION.

- 1 REMOVE THE CAP OF THE MINERAL BASKET PORT TURNING IT COUNTER CLOCKWISE;
- 2 FILL THE BASKET WITH A MINERAL (CALCIUM, MAGNESIUM, HIMALAYAN ROCK SALT);
- 3 PUT THE CAP BACK ON THE BASKET PORT AND TURN CLOCKWISE TO LOCK;
- 4 SELECT THE DESIRED WATER LEVEL AND TURN THE DEVICE ON.



* FOR MORE INFORMATION REFER TO THE CHAPTER MINERAL PORT USE.

NOTE:

MINERALS LIKE CALCIUM AND MAGNESIUM ARE ONLY RECOMMENDED FOR ALKALINE WATER LEVELS. THE HIMALAYAN ROCK SALT IS RECOMMENDED TO BE USED ONLY FOR PRODUCTION OF THE HIGHLY ACIDIC WATER (HIGH ACIDIC). IF YOU HAVE ANY MINERAL SUBSTANCE LEFT IN THE BASKET, DO NOT LEAVE IT THERE, REMOVE THE BASKET AND STORE IT OUTSIDE THE DEVICE.

○ *"Your path to healthy water"*

SETTINGS




LOCK OPTION

SELECT THE DESIRED WATER LEVEL YOU WANT TO LOCK AND PRESS AND HOLD THE  BUTTON FOR 3 SECONDS. YOU'LL HEAR A VOICE PROMPT INDICATING THAT THE OPTION HAS BEEN ACTIVATED AND YOU'LL SEE THE  ICON ON THE SCREEN. TO UNLOCK, PRESS AND HOLD THE  BUTTON AGAIN FOR 3 SECONDS AND YOU'LL HEAR A VOICE PROMPT INDICATING THE OPTION HAS BEEN DEACTIVATED.

TDS VALUE ADJUSTMENT

PRESS AND HOLD THE  BUTTON FOR 5 SECONDS TO ACCESS THE BACK MENU SETTING. THIS WILL BE THE FIRST PARAMETER THAT THE IONIZER WILL ALLOW YOU TO CHANGE. PRESS "+" OR "-" BUTTON TO INCREASE OR DECREASE THE VALUE IN THE SCREEN. PRESS "ENTER" BUTTON TO SAVE. PRESS AND HOLD THE "MODE" BUTTON FOR 5 SECONDS TO EXIT.



PH VALUE ADJUSTMENT

PRESS AND HOLD THE **MODE** BUTTON FOR 5 SECONDS TO ACCESS THE BACK MENU SETTING. PRESS THE DESIRED WATER LEVEL TO BE MODIFIED AND THEN PRESS THE "+" OR "-" TO CHANGE THE PARAMETER. PRESS "ENTER" BUTTON TO SAVE THE SELECTION. REPEAT AT ALL THE WATER LEVELS THAT YOU WANT TO MODIFY. PRESS AND HOLD THE "MODE" BUTTON FOR 5 SECONDS TO EXIT.



LANGUAGE OPTION

PRESS AND HOLD THE **MODE** BUTTON FOR 5 SECONDS TO ACCESS THE BACK MENU SETTING. PRESS "ENTER" UNTIL YOU SEE A LANGUAGE OPTION. PRESS "+" OR "-" BUTTON TO CHANGE THE LANGUAGE AND PRESS **ENTER** BUTTON TO SAVE THE SELECTION. PRESS AND HOLD THE **MODE** BUTTON FOR 5 SECONDS TO EXIT.



SELF CLEANING CYCLE SETUP

PRESS AND HOLD THE **MODE** BUTTON FOR 5 SECONDS TO ACCESS THE BACK MENU SETTING. PRESS **ENTER** UNTIL YOU SEE "CLEAN" OPTION ON THE SCREEN. PRESS "+" OR "-" TO SELECT THE FREQUENCY OF THE CYCLE (OPTIONS FROM EVERY 10 TO 60 LITRES) AND PRESS **ENTER** BUTTON TO SAVE THE SELECTION. PRESS AND HOLD THE **MODE** BUTTON FOR 5 SECONDS TO EXIT.


○ *"Your path to healthy water"*

FILTER COUNTER RESET

PRESS AND HOLD THE  BUTTON FOR 5 SECONDS TO ACCESS THE BACK MENU SETTING. PRESS  UNTIL YOU SEE A "CLEAN" OPTION ON THE SCREEN. PRESS  AND THE  BUTTONS AT THE SAME TIME. YOU'LL NOTICE THAT THE FILTER COUNT WILL GO BACK TO 9,000 LITRES AND THE GRIND WILL BE FULL AGAIN. PRESS AND HOLD THE  BUTTON FOR 5 SECONDS TO EXIT.

DEFAULT RESET

BY CHOOSING THIS OPTION YOU WILL BRING ALL THE VALUES TO THEIR ORIGINAL FACTORY SETTING. PRESS AND HOLD THE  BUTTON FOR 5 SECONDS TO ACCESS THE BACK MENU SETTING. PRESS  UNTIL YOU SEE A "CLEAN" OPTION ON THE SCREEN. PRESS AND HOLD  AND  BUTTONS AT THE SAME TIME FOR 5 SECONDS. AFTER THE PROMPT PRESS THE  BUTTON. PRESS AND HOLD THE  BUTTON FOR 5 SECONDS TO EXIT.



VOLUME ADJUSTMENT

PRESS AND HOLD THE  BUTTON TO CHANGE THE VOLUME OF THE SOUNDS OF THE DEVICE. YOU HAVE 4 VOLUME OPTIONS: HIGH, MIDDLE, LOW AND MUTE. AFTER PRESSING THE DESIRED VOLUME OPTION YOU'LL HEAR A SOUND AS A SAMPLE OF THE VOLUME. THE VOLUME OF THE DEVICE IS DEFAULTLY SET ON MIDDLE.

MINERAL PORT USE

IT IS NOT COMPULSORY TO USE MINERAL PORT. IT IS A BONUS FOR THOSE WHO LIVE IN THE AREA WITH SOFT WATER OR THOSE WHO WANT TO MAKE EXTREMELY ALKALINE OR ACIDIC WATER ONCE IN A WHILE. IT IS NOT RECOMMENDED TO DO IT MORE OFTEN DUE TO POSSIBLE CLOGGING AND CLEANING OF THE ELECTRODES OF THE DEVICE AFTERWARDS. IF YOU DESIRE TO MAKE EXTREMELY ALKALINE OR ACIDIC WATER, MAKE A LARGER AMOUNT AND STORE IT.



FOR THE PRODUCTION OF EXTREMELY ALKALINE WATER USE CALCIUM OR OTHER ALKALIZING MINERAL OF PHARMACEUTICAL QUALITY IN LARGER CRYSTALS. FOR THE PRODUCTION OF EXTREMELY ACIDIC WATER USE HIMALAYAN ROCK SALT. HIMALAYAN ROCK SALT OR ANY OTHER MINERALS DO NOT FORM A PART OF THE PACKAGE, BUT IT IS POSSIBLE TO OBTAIN THEM AT YOUR LOCAL DEALER OF ZIVAVODA.CZ OR IN A SPECIALIZED SHOP.

IN CASE YOU DESIRE TO PRODUCE WATER OF EXTREME PH AND ORP VALUES, ALWAYS SELECT THE HIGHEST POWER LEVELS (ALKALINE 4 AND ACIDIC 3), LOWER THE WATER FLOW WITH CONTROL VALVE PLACED ON THE SIDE OF THE DEVICE (OR THE BALL VALVE) TO THE MINIMUM AND INSERT THE CHOSEN MINERAL IN THE MINERAL BASKET ACCORDING TO INSTRUCTIONS BELOW:

NOTE:

- 1 BY USING LOW-QUALITY MINERALS YOU CAN DAMAGE THE IONIZER, WHICH CAN LEAD TO LOSS OF WARRANTY.
- 2 DO NOT USE HIMALAYAN ROCK SALT OR OTHER MINERALS WITH ANY DEVICES EXCEPT WITH CHANSON MIRACLE MAX OR MIRACLE MAX ROYALE
- 3 DO NOT USE ORDINARY TABLE SALT!

IF THE SALT DOES NOT DISSOLVE COMPLETELY DURING THE PROCESS OF WATER PRODUCTION, EMPTY THE MINERAL BASKET IN THE PORT, CLEAN IT SO THERE ARE NO RESIDUES LEFT AND PLACE IT BACK TO THE DEVICE. THE IONIZER CAN BE USED NORMALLY AGAIN.

- 1 MAKE SURE THE POWER BUTTON IS OFF AND THE DEVICE IS ON STANDBY OR IN SLEEP MODE.
- 2 OPEN THE CAP OF THE MINERAL PORT AND PULL OUT THE BASKET (WHITE COLOUR).
- 3 FILL THE BASKET WITH MINERAL UP TO 20-80% OF THE CONTAINER VOLUME.
- 4 INSERT THE BASKET BACK TO THE PORT AND PRESS IT DOWN AT THE END. TURN THE CAP CLOCKWISE AND TIGHTEN IT FIRMLY.
- 5 SELECT ONLY ACIDIC 3 LEVEL OF WATER WHEN USING HIMALAYAN ROCK SALT OR ONLY ALKALINE 4 LEVEL OF WATER WHEN USING CALCIUM OR OTHER MINERALS. PRESS THE BUTTON FOR WATER PRODUCTION.

○ *"Your path to healthy water"*

IONIZER CARE

DUE TO WATER FLOW, IT IS NATURAL FOR THE IONIZER TO SLOWLY CLOG. IT IS THEREFORE ESSENTIAL TO GIVE IT'S CARE DUE ATTENTION. ALTHOUGH THE DEVICE IS EQUIPPED WITH AUTOMATIC SELF-CLEANING SYSTEM, IT IS ALSO RECOMMENDED TO PREVENTIVELY PERFORM ADDITIONAL CLEANING WITH CITRIC ACID AT LEAST TWICE A YEAR, MORE OFTEN IN AREAS WITH HARD WATER.

HOW TO CARE FOR YOUR IONIZER PROPERLY?

TO ENSURE THAT YOUR IONIZER FUNCTIONS IN THE MOST EFFECTIVE WAY, IT IS ESSENTIAL TO PREVENT ITS CLOGGING BY IMPURITIES FROM WATER AND SEDIMENTS NATURALLY PRODUCED DURING THE IONIZATION PROCESS.

IT IS RECOMMENDED TO PERFORM SERVICE CLEANING EVERY 2 MONTHS TO MAINTAIN YOUR WATER IONIZER AT BEST PERFORMANCE AND TO PREVENT CALCIUM BUILTUP INSIDE ELECTROBATH.

PLEASE REFER TO THE INSTRUCTION ON THE CHANSON C-CLEAN KIT WHEN PERFORMING SERVICE CLEAN.

CLEANING IS SIMPLE AND WITHOUT ADDITIONAL ACTIONS

- 1 REMOVE THE SIDE PANEL OF THE CONSOLE UNIT PLACED UNDER THE KITCHEN DESK AND REMOVE „PJ7000" FILTER.
- 2 OPEN C-CLEAN CARTRIDGE AND INSERT CITRIC ACID TO THE „FILL TO HERE" INDICATOR ON THE CARTRIDGE.
- 3 CLOSE C-CLEAN CARTRIDGE FIRMLY.
- 4 INSERT C-CLEAN CARTRIDGE INTO THE IONIZER FILTER BY LINING UP THE „IN" ARROW TO THE MID POINT AND PUSH DOWN FIRMLY. TURN CARTRIDGE CLOCKWISE TO WHERE THE „LOCK" MEETS THE MID POINT.
- 5 ACTIVATE SERVICE CLEAN FUNCTION IN SETUP MODE OF THE DEVICE.

FOR ACTIVATION PRESS AND HOLD „MODE“ BUTTON.
ONCE YOU ARE IN MAIN MENU PRESS „ENTER“ BUTTON
TO GO TO THE „CLEAN“ MENU.



WHILE IN THE „CLEAN“ MENU SCREEN, PRESS AND
HOLD „POWER“ BUTTON FOR 5 SECS. TO ACTIVATE THE
CITRIC CLEANING PROCESS.



SERVICE CLEAN WILL TAKE 35 MINUTES (2.129 SECS.)

6 ONCE SERVICE CLEAN IS FINISHED REMOVE CLEANING CARTRIDGE AND INSERT „PJ7000“ FILTER AND SIDE PANEL BACK.

TIPS AND ADVICE

A OUR WATER IONIZERS ARE SET TO SELF-CLEAN AFTER EVERY 10-60 LITRES OF USED WATER, THEREFORE IT IS NOT ESSENTIAL TO TAKE FURTHER ACTION APART FROM REGULAR FILTER CHANGE WHICH THE DEVICE WILL INFORM YOU ABOUT.

B IF YOU LIVE IN THE AREA WITH POOR QUALITY WATER IT IS RECOMMENDED TO PURCHASE A PRE-FILTRATION SYSTEM. CONTACT YOUR DEALER TO NEGOTIATE THE MOST FAVOURABLE TERMS.


*** REPLACE THE WHITE FILTER PAD (PP CLOTH) LOCATED AT THE BOTTOM OF THE C-CLEAN CARTRIDGE WHEN NECESSARY. THERE ARE EXTRA PADS INCLUDED IN THE C-CLEAN PACKAGE.

NOTE:


IN CASE THE DEVICE IS NOT PROPERLY CARED FOR, IT CAN BLOCK ITSELF. DAMAGE CAUSED BY BLOCKAGE OF THE DEVICE OR IMPROPER CARE IS NOT COVERED BY THE WARRANTY AND IN SUCH CASES THE RESPONSIBILITY LIES WITH THE OWNER OF THE DEVICE.

○ *"Your path to healthy water"*


HOW TO CHANGE THE FILTER




- 1** LOOKING AT THE IONIZER FROM THE FRONT, REMOVE THE LEFT PANEL BY SLIDING IT UPWARDS.




- 2** UNLOCK THE FILTER BY TURNING IT ANTICLOCKWISE




- 3** REMOVE THE FILTER



- 4** INSERT THE NEW FILTER



- 5** LOCK THE NEW FILTER BY TURNING IT
ANTICLOCKWISE



- 6** SLIDE THE PANEL DOWNWARDS
TO ITS ORIGINAL PLACE

- 7** DO THE FILTER SERVICE RESET
(SEE FILTER COUNT RESET INSTRUCTIONS, P. 24)

WARNING

IT IS ESSENTIAL TO FOLLOW THE INSTRUCTIONS

- ① IT IS IMPORTANT TO MAKE SURE TO CLOSE ALL WATER SUPPLIES AND TO UNPLUG THE IONIZER FROM POWER OUTLET IF YOU WILL NOT BE USING IT FOR AN EXTENDED PERIOD OF TIME.
- ① DO NOT PLUG AND UNPLUG THE IONIZER FROM THE POWER OUTLET REPEATEDLY. THIS CAN CAUSE ELECTRICAL DAMAGE TO THE DEVICE AND YOU RUN THE RISK OF LOSING WARRANTY.
- ① REMOVE ANY DUST AND DRY ANY WATER FROM THE POWER CORD AS THIS CAN CAUSE ELECTRICAL PROBLEMS AND COULD BE THE CAUSE OF FIRE.
- ① DO NOT USE EXCESS OF WATER OR ANY ABRASIVE CLEANER TO CLEAN ANY PART OF THE IONIZER. MAKE SURE THE IONIZER IS UNPLUGGED FROM THE POWER OUTLET WHEN CLEANING IT. THIS WILL HELP PREVENT DAMAGES TO IONIZER 'S BODY OR ELECTRONICS.
- ① DO NOT INSTALL THE IONIZER IN AREAS OF EXTREME COLD OR HEAT.
- ① IF YOU NOTICE ANY LEAKS FROM THE DEVICE, CLOSE THE WATER SUPPLY IMMEDIATELY AND UNPLUG THE IONIZER FROM THE POWER OUTLET. CONTACT YOUR DEALER FOR ASSISTANCE.
- ① IN CASE ATYPICAL NOISES COME FROM THE DEVICE OR THE DEVICE FUNCTIONS IN NON-STANDARD WAY, UNPLUG IT FROM THE POWER OUTLET AND CONTACT TECHNICAL SUPPORT FOR ASSISTANCE.
- ① DO NOT PLACE ANY OBJECTS THAT CAN CREATE FIRE CLOSE TO THE IONIZER AS THIS COULD CAUSE DAMAGE TO THE DEVICE.
- ① WHEN MOVING THE IONIZER, UNPLUG THE DEVICE FROM THE POWER OUTLET FIRST. DO NOT PULL THE CORD, IT MAY COME OFF FROM THE POWER OUTLET OR FROM THE POWER CORD CONNECTION UNDERNEATH THE IONIZER AND CAUSE ELECTRICAL DAMAGE.

- ❶ DO NOT PLUG THE IONIZER IF ELECTRICAL SOCKET ON THE IONIZER OR POWER OUTLET ARE LOOSE. THIS WAY YOU WILL AVOID ELECTRICAL DAMAGE OR FIRE.
- ❶ DO NOT TOUCH THE POWER CORD, ELECTRICAL SOCKET OR POWER OUTLET WITH WET HANDS TO AVOID ELECTRICAL SHOCK OR FIRE.
- ❶ DO NOT BEND OR PINCH POWER CORD OR PLACE UNDER HEAVY OBJECTS THAT MIGHT DAMAGE IT. THIS COULD RESULT IN ELECTRICAL SHOCK OR DAMAGE BY FIRE.
- ❶ DO NOT USE MULTI-SOCKET POWER OUTLET TO PLUG IN IONIZER, ESPECIALLY IF IT IS BEING USED TO POWER UP OTHER APPLIANCES. THIS COULD RESULT IN ELECTRICAL DAMAGE OR FIRE.
- ❶ DO NOT ATTEMPT TO REPAIR THE POWER CORD. DISCONNECT THE POWER OUTLET AND CONTACT TECHNICAL SUPPORT FOR REPLACEMENT.
- ❶ MAKE SURE THAT THE POWER OUTLET SOCKET HAS A GROUND CONNECTION.
- ❶ DO NOT TOUCH THE ELECTRICAL SOCKET WITH WET HANDS TO AVOID ELECTRICAL SHOCK OR FIRE.
- ❶ DO NOT CLEAN THE IONIZER USING WATER SPRAY - IT COULD CAUSE AN ELECTRICAL SHOCK. ALWAYS DISCONNECT THE IONIZER FROM THE ELECTRICITY BEFORE CLEANING.
- ❶ DO NOT USE CABLES OR PLUGS WORN WITH USE AND DO NOT ATTEMPT TO REMODEL THEM. DO NOT TWIST THE CABLE, BEND IT, STRETCH IT, NOR MAKE ANY KNOTS OR PLACE HEAVY OBJECTS ON IT. YOU RUN THE RISK OF ELECTRIC SHOCK OR SHORT CIRCUIT.
- ❶ REGULARLY CLEAN THE SOCKET FROM DUST. IF THE SOCKET IS DUSTY, CLEAN IF FIRST BEFORE INSERTING THE PLUG. IF DUST GETS INTO THE SOCKET, IT INCREASES THE RISK OF ELECTRIC SHOCK DUE TO HIGHER HUMIDITY LEVELS.
- ❶ THE PLUG MUST BE PLUGGED IN COMPLETELY.
- ❶ PJ7000 REPLACEMENT FILTER MUST BE REPLACED AT LEAST EVERY 12 MONTHS OR AFTER USING 10,000 LITRES OF WATER. YOUR DEALER WILL PROVIDE YOU WITH GENUINE REPLACEMENT FILTERS.
- ❶ IF THE DEVICE FALLS INTO WATER, UNPLUG IT FROM THE POWER OUTLET, STOP USING IT AND FOLLOW THESE INSTRUCTIONS:
1.DISCONNECT THE POWER SOURCE; 2. DRY THE DEVICE; 3. CONTACT YOUR DEALER.

○ *"Your path to healthy water"*



- ① IF THERE IS AN UNUSUAL SITUATION LIKE SMOKE OR WATER LEAKAGE FROM THE DEVICE, UNPLUG IT FROM THE POWER AND TURN OFF THE WATER VALVE.
- ① DO NOT USE ALKALINE WATER TO SWALLOW MEDICINE.
- ① DO NOT DRINK ACIDIC WATER (PH VALUE LOWER THAN 7.0).
- ① DO NOT USE IONIZER FOR UNSUITABLE WATER – WATER FROM WELLS, VERY HARD WATER, AND WATER WITH A LARGE AMOUNT OF SEDIMENT OR HIGH LEVEL OF UNDISSOLVED SOLIDS. ALWAYS CONSULT YOUR DEALER FIRST.
- ① DO NOT STORE ALKALINE WATER IN BRONZE OR ALUMINIUM CONTAINERS. IT IS RECOMMENDED TO USE PRIMARILY GLASS OR CERAMIC CONTAINERS FOR STORAGE.
- ① DO NOT USE WATER WITH A TEMPERATURE HIGHER THAN 40°C – IT CAN CAUSE DAMAGE TO THE FILTERS IN THE DEVICE.
- ① PROTECT THE DEVICE FROM FROST, DIRECT SUNLIGHT AND HEATING.
- ① IF YOU KNOW THAT YOU WILL NOT BE USING IONIZER FOR A PERIOD LONGER THAN ONE DAY, UNPLUG THE DEVICE FROM THE POWER OUTLET AND CLOSE THE WATER VALVE TO PREVENT LEAKAGE. IF YOU ARE NOT GOING TO USE THE DEVICE FOR AN EXTENDED PERIOD OF TIME, REMOVE THE FILTERS, DRY THEM AND KEEP THEM IN THE FRIDGE.
- ① ALKALINE OR FILTERED WATER STORE IN CLEAN, CLOSED CONTAINERS. WHEN STORED AT ROOM TEMPERATURE, THE WATER SHOULD BE USED WITHIN 1 DAY, WHEN STORED IN THE FRIDGE, IT SHOULD BE USED WITHIN 2 DAYS.
- ① IF IT IS YOUR FIRST TIME DRINKING ALKALINE LIVING WATER, THE RECOMMENDED DOSAGE IS 1 OR 2 GLASSES OF ALKALINE 1 WATER LEVEL. AFTER 2 WEEKS, WHEN YOUR BODY GETS USED TO ALKALINE LIVING WATER, IT IS POSSIBLE TO MOVE TO A HIGHER LEVEL OF IONIZATION (ALKALINE 2 OR 3).
- ① DRINKING HIGHLY ALKALINE WATER (PH VALUE HIGHER THEN 10) CAN CAUSE DISCOMFORT.
- ① IT IS PROHIBITED TO DISMANTLE THE DEVICE. DO NOT REPAIR IT, REMODEL IT, OR ALTER ITS FUNCTION – YOU RUN THE RISK OF ELECTRIC SHOCK, FIRE AND WARRANTY VOID.



TROUBLESHOOTING

PROBLEM	CAUSE	SOLUTION
Internal leak from device	Find out where the leak is coming from.	Contact your dealer for assistance.
Leak from inlet or outlet fitting	Check fitting and tube to identify where exactly the leak is coming from.	Remove the tube and check that the shape is round and the cut is straight and not at an angle and reconnect to fitting making sure it goes as far in as possible.
Measured values are not what they should be	pH reagent drops might be expired or dysfunctional.	Contact your dealer and order new pH testing drops.
	The water flow might be too high.	Reduce flow as needed.
	Calcium build-up might be present.	In hard water areas it is recommended to perform citric acid flushes in addition to self-cleaning cycles to reduce build-ups. The frequency of flushes depends on the hardness of the water.

○ *"Your path to healthy water"*



Bleach smell from acid water	Making acid water might produce hypochlorous acid which is what gives the water its bleachy smell.	The smell is harmless to the skin.
White flakes in the alkaline water	The ionization process concentrates the calcium in the water.	This is harmless. You can use the water.
	Calcium build-up on electroplates.	In hard water areas, it is recommended to perform citric acid flushes in addition to self-cleaning cycles to reduce build-ups. The frequency of flushes depends on the hardness of the water.
Restriction of water flow	Check the side flow control valve, water diverter valve and main shut off valve.	If any of these are closed or partially closed, water flow will be restricted.
	Have the filters been changed?	If the filters haven't been changed, the flow restriction could be an indication of the need to replace the filters. Dirt and debris clog the filter, thus reducing water flow.
	White flakes in water due to calcium build-ups.	In hard water areas, it is recommended to perform citric acid flushes in addition to self-cleaning cycles to reduce the build-ups.



Water dripping from drain outlet after use	Verify if it stops after a few seconds after turning the ionizer off.	This is normal as there will be still water inside the ionizer after being turned off, especially from the drain. If a long time has passed after using the ionizer and the water is still dripping, contact your dealer for further assistance.
Bad odor coming out of ionizer	Check if filters have been replaced.	Contact your dealer to purchase new filters.
Restriction of water flow	Check the side flow control valve, water diverter valve and main shut off valve.	If any of these are closed or partially closed, water flow will be restricted.
	Have the filters been changed?	If the filters haven't been changed, the flow restriction could be an indication of the need to replace the filters. Dirt and debris clog the filter, thus reducing water flow.
	White flakes in water due to calcium build-ups.	In hard water areas, it is recommended to perform citric acid flushes in addition to self-cleaning cycles to reduce the build-ups.
Ionizer cannot be turned on	Check the ionizer's fuse.	Contact your dealer.
Ionizer stops working suddenly and turns itself off	Has the ionizer been in use for longer period of time?	If so, remember that the ionizer will shut itself off after 15 minutes of use.
	Verify if there was no overheating error on the screen.	If so, wait 60 minutes before using the ionizer again to allow enough time for the ionizer to cool down.

SPECIFICATIONS

ITEM	TOP COUNTER WATER IONIZER
MODEL	MIRACLE MAX PLUS
RATED VOLTAGE/FREQUENCY	AC 100 – 240V/ 50-60 HZ
IONIZER DIMENSIONS	247 × 157 × 335 (WIDTH X DEPTH X HEIGHT IN MM)
POWER	175W
MAXIMUM WATER PRESSURE	8 – 70 PSI
WATER TEMPERATURE	5 – 40°C / 41 – 104°F

CHANSON WATER FILTRATION SYSTEMS

- EASY AND QUICK INSTALLATION
- ENSURE THE BEST WATER QUALITY
- BEST FIT WITH CHANSON WATER IONIZERS



N5 PLUS



P1



SHOWER FILTER



"Your path to healthy water"



